Sentiment Analysis of Electronic Government Services Utilizing the Naive Bayes Algorithm

Winny Purbaratri¹, Hindriyanto Dwi Purnomo², Danny Manongga², Iwan Setyawan², Hendry²

¹Institut Keuangan-Perbankan dan Informatika Asia Perbanas, Jakarta, Indonesia ²Universitas Kristen Satya Wacana, Salatiga, Indonesia

Article Info

Article history:

ABSTRACT

Received August 10, 2023 Revised January 15, 2024 Accepted March 26, 2024

Keywords:

First Classifier Google Play store Nave Bayes Opinion Mining Sentiment Analysis E-Government which involves the use of communication and information technology to provide Public services have three obstacles. One of these obstacles is the implementation of e-Government by autonomous regional governments is still carried out individually. Apart from that, implementing the website regions are also not supported by efficient management systems and work processes, this is partly the case This is largely due to the lack of preparation of regulations, procedures and limited resources man. Apart from that, many local governments consider implementing e-Government only involves developing local government websites. More precisely, the implementation of e-Government It is only limited to the maturity stage and ignores the three other important stages that need to be completed. The aim of this research is to determine the level of public approval for government application services. This research consist of user reviews and comments obtained from Google Play Store. The results of this investigation produce a level of precision The highest is achieving a score of 83%. Additionally it shows an accuracy rate of 83%, level completeness is 100%, and F-measure is 90.7%.

Copyright ©2024 *The Authors. This is an open access article under the* <u>*CC BY-SA*</u> *license.*



Corresponding Author:

Winny Purbaratri, +6281219203209 Faculty of Information Technology, Universitas Kristen Satya Wacana, Salatiga, Indonesia Email: 982022025@student.uksw.edu.

How to Cite:

W. purbaratri, H. Purnomo, D. Manongga, I. Setyawan, and H. Hendry, "Sentiment Analysis of e-Government Service Using the Naive Bayes Algorithm", *MATRIK: Jurnal Manajemen, Teknik Informatika, dan Rekayasa Komputer*, Vol. 23, No. 2, pp. 441-452, Mar, 2024.

This is an open access article under the CC BY-SA license (https://creativecommons.org/licenses/by-sa/4.0/)

1. INTRODUCTION

E-government is a supporting tool for realizing clean and good governance because Indonesia is still new in implementing e-government and has not developed rapidly, so clean and good governance in Indonesia has not been achieved [1]. Moreover, E-gov is a government-initiated digital innovation aimed at enhancing the effectiveness and efficiency of business processes to fulfill the public's needs [2]. This study combines topic modeling and clustering methods to examine public comments on e-government. The primary goal of the suggested approach is to identify the specific subjects that make up written citizen comments in the e-government setting and enhance the quality of e-services [3]. Research to analyze public opinion related to e-government use, and analyze modeling topics related to e-government use has been carried out by several researchers [4, 3, 5–8, 2, 9] When a software product is used in a certain context, the interaction between humans and the program is related to the software quality (QinU). Additionally, sentiment analysis is used as a method to assess the caliber of application goods [9–18] one of them is e-government application product [7]. The main objective of the proposed sentiment analysis is to find out citizens' comments about being written in e-government environments and to improve the quality of e-services [3]. Alpukat Mobile Application is a population application used by the provincial government of DKI Jakarta [5].

E-government research has attracted the attention of several researchers including topics that discuss open government, smart cities and analytics. This study investigates the quality of e-government apps by employing sentiment analysis, a methodology commonly employed to evaluate the quality of software products. Prior research has indicated the efficacy of Naive Bayes algorithms in sentiment analysis for government applications, with diverse outcomes in terms of accuracy and methodology. Several research have examined the utilization of the Naive Bayes algorithm in the Mobile Alpukat and Sentuhh Tanahku applications [11], along with the deployment of the Support-vector-machine approach in the Jamsostek application [15]. Sentiment analysis research that uses different methods is Kuwait e-government with Logistic regression and the result Logistic regression [13], M-Health PeduliLindungi Application [14] with Lexicon-based and Naive Bayes Method and Mobile JKN [10] with Maximum Entropy and Mutual Information Selection. The findings indicate a significant degree of precision in the classification of sentiment. This study distinguishes itself by employing a novel methodology to examine the implementation of the Alpukat application in DKI Jakarta, hence contributing unique insights within this specific context.

This study presents a novel viewpoint on applying sentiment analysis to enhance e-government services through a comparative examination of prior research. This study contributes to the extant body of literature by employing the Naive Bayes method for sentiment analysis in the context of e-government applications. Prior research has presented varying methodologies and degrees of precision regarding sentiment analysis of government applications. This study differentiates it by focusing its research on the Alpukat application, employed by the DKI Jakarta provincial administration, and demonstrating a significantly elevated degree of precision in sentiment classification. This research offers a novel perspective on the efficacy of the Naive Bayes approach in the context of e-government through a comparative analysis with earlier studies. This study situates itself within the e-government framework, specifically examining the Alpukat application employed by the provincial administration of DKI Jakarta. While there have been prior investigations into sentiment analysis in the context of e-government, this study distinguishes itself by employing a distinct methodological approach and providing novel perspectives on this particular application. This study demonstrates a notable degree of accuracy in sentiment categorization using the Naive Bayes approach. This distinguishes it from prior research endeavors that may have employed alternative methodology or focused on disparate applications. This study contributes significantly to the current body of literature by introducing a fresh viewpoint on the effectiveness of the Naive Bayes methodology in e-government applications. Many of QinU's measurement models are subjectively incoherent and tied to inefficient measurement formulations. To accurately measure QinU consuming software reviews, use the QinUF framework [19]. Quality of service is fundamental to public acceptance and use of e-government websites, although this aspect is frequently overlooked during the design and implementation stages of online public services [10].

This research aims to determine the level of public approval for government application services and contribute to the field of e-Government related to the use of a unique sentiment analysis approach that uses the Naive Bayes algorithm. This methodology is applied to the Avocado application used by the DKI Jakarta Provincial Government. These differences differentiate this research from previous studies which may have used different methods or concentrated on different uses. This research makes a valuable contribution to the field of e-government by demonstrating the effectiveness of the Naive Bayes technique in sentiment classification. This report offers a new perspective in measuring the quality of user interactions with e-Government services, especially in terms of accuracy.

2. RESEARCH METHOD

The study was conducted in July of 2023. The present study employs an experimental design, utilizing data gathered from the Google Play Store as the primary experimental material. The case study platform utilized by the Jakarta Provincial Population Service is Alpukat Apps. There are six steps to take in this study, shown in Figure 1. This involves gathering the data, manually labeling it, preprocessing it, TF-IDF weighing it, separating the data into training and test sets, classifying the data using the Naive Bayes algorithm, and assessing the results. One of these emotional labelsPositive, Neutral, or Negativecan be the system's output.



Figure 1. Research Methodology

In this study, we have identified a research topic, formulated a research question, and established research objectives. Table 1 addresses the study inquiries and substantiates the research aims. The topic under consideration will be examined and analyzed in the next section, dedicated to findings and analysis.

Table 1. Research Problem and Research Question

Research Problems	Research Question	Research Objective
Citizens may accept applications submitted	Is the DKI Jakarta Alpukat Application's	The DKI Jakarta provincial government de-
by the DKI Jakarta provincial administra-	categorization system accurate in gathering	veloped the Alpukat Application, which uses
tion.	public opinion?	an algorithm to provide accurate public opin-
		ion results at citizen acceptance.

2.1. Data Scrapping

Data scraping from the internet is the first step in gathering and entering data into this system. We use Google Colab. The data gathered from the Google Play Store comprised 100 comments. In this study, training data were derived from 100 prior data, and 20% of the test data were derived from 20 test data. After data is gathered, positive or negative labels are manually assigned, as presented in Figure 4.

2.2. Manual Labeling

The gathered reviews will be classified as good, negative, or neutral. The procedure is manual. Positive review data, negative review data, and neutral review data were all extracted from the labeling findings. The importance of positive, negative, and neutral labels follows.

2.3. Preprocessing

Preprocessing, which consists of several stages, is one of the stages to eliminate problems that can interfere with the outcome of data processing. The preprocessing phase includes. Case Folding: This involves several steps, including removing usernames or user mentions (@), hashtags (\sharp), and non-letter characters, converting text to lowercase (case folding), and eliminating URLs or links from each comment. Filtering: In this stage, unnecessary words are removed from the token results. Commonly occurring words considered insignificant, along with stopwords such as "period" and "link," are also filtered out. Stemming: This process simplifies words into their root or base form. Tokenizing: Each word is segmented into tokens based on identified gaps or spaces within the text.

2.4. Transformation

One technique for creating word weighting in the word extraction process by utilizing standard word calculations on returned data is TF-IDF (Term Frequency-Inverse Document Frequency), showing the formulas (3.5.) and (2). The word frequency and the

concept of inverse frequencies are combined in this weighting technique. Frequency refers to the frequency of occurrence of a term in a document.

$$TF(term) = \frac{\text{(the number of occurrences of the term in the document)}}{\text{(the total amount of data in the document)}}$$
(1)

By examining how often a word occurs across the full collection of documents, the Inverse Document Frequency (IDF) method may determine how essential a word is. Words that are seldom used are given additional weight by this IDF component. The following formula is used to calculate IDF. Typically, the formula is as follows.

$$IDF(term) = \log \frac{\text{(total jumlah dokumen dalam koleksi)}}{\text{(the number of documents containing the term)}}$$
(2)

2.5. Separation of Data

The Naive Bayes Classifier is a popular machine learning method for classification tasks, particularly for text classification on sentiment analysis. The Naive Bayes Model is trained to predict model parameters for this text categorization using labeled training data sets. The Naive Bayes algorithm performs probability calculations and other classification-related calculations throughout the training phase. This parameter includes probability and prior probability based on observed characteristics and class labels in the training data. Here is the source code for using the 'Multinomial ()' class from the scikit-learn package to train using Naive Bayes. The training data (X_train and Y_train) are used to train this model.

Training data and test data are the two categories of labeled data. The authors split the training and test data into two groups for the following reasons: first, the total amount of training data is less than the total amount of test data, and second, the total amount of exercise data is more than the total amount of test data.

2.6. Confusion Matrix

To determine the accuracy performance outcomes of the Naive Bayes algorithm, which includes precision, precision, and recall, at this level of assessment, we will employ matrix confusion. One technique for evaluating the effectiveness of categorization models is the confusion matrix. Accuracy (3), Precision (4), Recall (5), and F-measure (6) are the formulas used as follows:

$$Accuracy = \frac{TP + TN}{(TP + FP + FN + TN)}$$
(3)

$$Precision = \frac{TP}{(TP + FP)} \tag{4}$$

$$Recall = \frac{TP}{(TP + FN)}$$
(5)

$$F - measure = \frac{2 \times precision \times recall}{Precision + recall}$$
(6)

See also:

True Positive (TP) is the amount of data with a positive value correctly predicted as positive.

True Negative (TN) is the amount of data that has a negative value and is correctly predicted to be negative, False Positive (FP) is several data that is negative but predictable to be positive,

False negative (FN) is a data set with a positive but predicted negative value.

This study is categorized using the Naive Bayes method. The Bayes Theorem, derived from Bayesian statistics with strong independent assumptions, forms the method's foundation.

2.7. Visualization

The term "cloud" is employed to visually represent the most frequently occurring words. Word clouds are a visually captivating technique for presenting textual data, highlighting the frequency of word occurrences in a given text by adjusting the size of each word. Within the scope of this study, the term "word cloud" was utilized to visually depict the words that were most commonly utilized in user reviews of the Alpukat e-Government service application.

3. RESULT AND ANALYSIS

This part shows the outcomes and analyses based on the sentiment analysis performed on user reviews of the Alpukat e-Government service application utilizing the Naive Bayes Classifier. The main data source utilized for this research was a collection of user reviews directly sourced from the Google Play Store. After the data collection process, 100 reviews were obtained, and the labeling process was carried out manually using positive, neutral, and negative labels. As shown in Table 5. The Alpukat Application gets negative user reviews, as shown in Figure 4. The results of the dataset are shown in Table 2.

The dataset underwent a variety of preprocessing processes before the application of the Naive Bayes Classifier. Preparing the text data for analysis included multiple stages, such as eliminating extraneous characters and words, segmenting the text into discrete units of words, and standardizing these units to minimize duplication and enhance the precision of the analysis. Implementing preprocessing techniques had a crucial role in preparing the dataset for sentiment analysis, which allowed the classifier to concentrate on the most significant aspects of the text.

The preprocessed data was subjected to the Naive Bayes Classifier to classify each review into one of three sentiment categories: positive, Neutral, or Negative. The categorization was conducted utilizing the probabilistic model of the Naive Bayes technique, which computes the probability of a given text being assigned to a specific category by considering the frequency and distribution of words.

The investigation's findings indicated that the users of the Alpukat application expressed a wide spectrum of sentiments. The categorization of reviews into sentiment groups was as follows: The statistical data provided illustrates the distribution of reviews across different categories. The classification accuracy was represented using a confusion matrix, which included the identification of True Positives (TP), True Negatives (TN), False Positives (FP), and False Negatives (FN) instances. Show formula (3).

Furthermore, a word cloud was generated to graphically represent the prevailing words within the various categories of reviews. Utilizing this visualization tool facilitated the identification of the predominant themes and characteristics frequently referenced by users, hence enhancing the comprehension of the underlying sentiments in a more nuanced manner.

Sentiment	Total
Positive	16
Neutral	1
Negative	83

Table 2 Datace

3.1. Data collection

In this study, a total of 100 data pointscomprising 100 training data and 100 test datawere sourced from Google Play data. Web scraping was employed as the method for data collection during the user evaluation of the Alpukat application. Google Colab and the provided software code were utilized to obtain the data. The outcomes of the web scraping process are illustrated in Figure 2.

```
!pip install google-play-scraper
from google_play_scraper import app
import pandas as pd
import numpy as np
from google_play_scraper import Sort, reviews
result, continuation_token = reviews(
    'com.disdukcapildki.alpukat',
    lang='id', f defaults to 'en'
    country='id', f defaults to 'us'
    sort=Sort.NEWEST, f defaults to Sort.MOST_RELEVANT you can use Sort.NEWEST to get newst reviews
    count=100, f defaults to 100
    filter_score_with=None f defaults to None(means all score) Use 1 or 2 or 3 or 4 or 5 to select certain
    score
)
```

Figure 2. Scrapping data with Google Colab

After scrapping data with Google Collab, the result of data scrapping is shown in Figure 3.

userName	userImage	content	score	thumbsUpCount	reviewCreatedVersion
sunshine46	https://play- lh.googleusercontent.com/a-/AD_cM	Kenapa sekarang tidak bisa lagi membuat KK dan	1	0	1.2.9
Deny Setiawan	https://play- lh.googleusercontent.com/a-/AD_cM	Sparn apk	4	0	1.2.9
Adrian Laksmana	https://play- lh.googleusercontent.com/a-/AD_cM	Kenapa skrg urus ktp harus balik lagi ke loket	3	0	1.2.9
Restu Yusri Muktiningrum	https://play- lh.googleusercontent.com/a-/AD_cM	login failed terus	3	0	None
tri aji	https://play- lh.googleusercontent.com/a/AAcHTt	Errooor mulu	1	0	1.2.7
it the number of	data wa gat				

Figure 3. Scrapping Data with Google Colab Result

After scrapping data, we have to label positive, neutral, and negative data. The procedure is manual. The outcomes of this labeling are described as data training and data testing. Table 3 shows example labeling data.

Table 3.	Labeled	Data	Review
----------	---------	------	--------

Label	Teks
Positive	Terimakasih bpk/ibu yang sudah membantu selama ini , pengurusan apa pun hanya dengan online sudah
	selsai semuanya tanpa ribet , tanpa pungut biaya ,gratis -gratis terimakasih pemerintah jakarta. semoga
	lebih di tingkatkan lg untuk aplikasi alpukat betawinya.
Neutral	Gg
Negative	Hari pertama berhasil submit permohonan pengajuan pindah provinsi. Bsk nya masuk aplikasi lg, sdh tdk
-	bs, muncul notif token telah expired. Ga ada kejelasan dr aplikasi ini. Ga ada contact center tau semacan nya untuk di hubungi.

Matrik: Jurnal Manajemen, Teknik Informatika, dan Rekayasa Komputer, Vol. 23, No. 2, March 2024: 441 – 452

446 🛛

3.2. Preprocessing

Pre-processing is a preliminary step in text mining that is carried out to weed out unnecessary words from the document and extract valuable information from unstructured data. Case Folding, Filtering, Tokenizing, and Stemming are the four steps in data preparation, Case folding is the data processing stage that makes all letters into small letters. Table 4 shows the results of the case folding stage.

Table 4. Case Fol	lding
-------------------	-------

Teks	Teks
Terimakasih bpk/ibu yang sudah membantu selama ini , pengurusan apa	terimakasih bpk/ibu yang sudah membantu selama ini , pengurusan apa
pun hanya dengan online sudah selsai semuanya tanpa ribet, tanpa	pun hanya dengan online sudah selsai semuanya tanpa ribet, tanpa
pungut biaya ,gratis -gratis terimakasih pemerintah jakarta. semoga	pungut biaya ,gratis -gratis terimakasih pemerintah jakarta. semoga
lebih di tingkatkan lg untuk aplikasi alpukat betawinya.	lebih di tingkatkan lg untuk aplikasi alpukat betawinya.

Filtering: Removing words from token results is not important. Readings and stopwords are removed. The stopword is also removed if a sentence contains words that often come out and are considered unimportant, such as time, links, etc. Example filtering data is show in Table 5.

Table 5. Filtering

Teks	Teks
terimakasih bpk/ibu yang sudah membantu selama ini , pengurusan apa	terimakasih bpkibu yang sudah membantu selama ini pengurusan apa
pun hanya dengan online sudah selsai semuanya tanpa ribet, tanpa	pun hanya dengan online sudah selsai semuanya tanpa ribet tanpa
pungut biaya ,gratis -gratis terimakasih pemerintah jakarta. semoga	pungut biaya gratis gratis terimakasih pemerintah jakarta semoga lebih
lebih di tingkatkan lg untuk aplikasi alpukat betawinya.	di tingkatkan lg untuk aplikasi alpukat betawinya.

The stemming stage is a stage that is also needed to reduce the number of different indices of one data so that a word that has a suffix or prefix will return to its basic form Table 6 shows an example of stemming data and Tokenizing Each word is now divided based on the discovered gaps. Table 7 shows an example of tokenizing.

Table 6. Stemming

Teks	Teks
Terimakasi dengan adanya aplikasi ini. Pengalaman yg menyenangkan	terimakasi ada aplikasi alam senang buat saat butuh potocopy kk saat
buat saya. Saat saya butuh potocopy KK dan saat itu saya kehabisan po-	habis potocopy kk coba minta lalu aplikasi nyata respon cepat terima
tocopy KK saya. Saya mencoba meminta melalui aplikasi ini ternyata	langsung kirim kk butuh dgn fomat pdf trimakasi dukcapil nama adi
respon yg sangat cepat saya terima langsung. Dan sy dikirimkan KK	prihartono senang hati merespon mohon aplikasi alpukat betawi tetap
yang saya butuhkan dgn fomat PDF. Trimakasi Dukcapil dan orang yg	karya demi bangsa
bernama Adi Prihartono yg dengan senang hati merespon permohonan	
saya pada aplikasi Alpukat Betawi ini. Tetaplah berkarya demi bangsa	
ini.	

Table 7. Tokenizing

Teks	Teks
Terimakasi dengan adanya aplikasi ini. Pengalaman yg menyenangkan	Terimakasi dengan adanya aplikasi ini Pengalaman yg menyenangkan
buat saya. Saat saya butuh potocopy KK dan saat itu saya kehabisan po-	buat saya Saat saya butuh potocopy KK dan saat itu saya kehabisan
tocopy KK saya. Saya mencoba meminta melalui aplikasi ini ternyata	potocopy KK saya Saya mencoba meminta melalui aplikasi ini ternyata
respon yg sangat cepat saya terima langsung. Dan sy dikirimkan KK	respon yg sangat cepat saya terima langsung Dan sy dikirimkan KK
yang saya butuhkan dgn fomat PDF. Trimakasi Dukcapil dan orang yg	yang saya butuhkan dgn fomat PDF Trimakasi Dukcapil dan orang yg
bernama Adi Prihartono yg dengan senang hati merespon permohonan	bernama Adi Prihartono yg dengan senang hati merespon permohonan
saya pada aplikasi Alpukat Betawi ini. Tetaplah berkarya demi bangsa	saya pada aplikasi Alpukat Betawi ini Tetaplah berkarya demi bangsa
ini.	ini

3.3. Transformation

The transformation stage is the stage of changing the data into a form that can be processed at the data mining stage, namely changing nominal data to text, namely nominal to text.

3.4. Separation of Data

After separation, data is divided into training and test sets. 80 percent of the training data and 20 percent of the test data from 100 data sets successfully scraped from Google Play made up the 8:2 total separation of the data in this research. The separation of data is shown in Table 8.

Table 8. Se	paration	Of	Data
-------------	----------	----	------

Data Review	Total
Data Training	80
Data Testing	20

3.5. Analysis and Evaluation

Using the Naive Bayes technique, we conducted sentiment analysis on Alpukat app reviews and compared the results across different categories. Table 9 contains the confusion matrix generated from the test data of 20 data.

Table 9. Confusion Matrix
Predictive

			Predictive	
		Positive	Negative	Neutral
	Positive	0	16	0
Actual	Negative	0	83	0
	Neutral	0	1	0

According to the data in Table 9, there are 16 predictable positive review data, 0 predictable positive review data as negative reviews, 0 predicting negative review data as positive reviews and 83 accurately forecast negative review data out of the 100 data predicted using the Naive Bayes Classifier algorithm. This study uses accuracy testing as a means to assess the performance of the classification approach using equation for Accuracy (3), equation (4) for Precision, equation (5) for Recall, and equation (6) for F-measure Value. Below are the classification calculation's outcomes based on the confusion matrix:

$$Accuracy = \frac{83+0}{(83+17+0+0)} = \frac{83}{(100)} = 0.83 \times 100\% = 83\%$$

$$Precision = \frac{83}{83+17} = \frac{83}{100} = 0.83 \times 100\%83\%$$

$$Recall = \frac{83}{83+0} = \frac{83}{83} = 1 \times 100\% = 100\%$$

$$F - measure = \frac{2 \times 83 \times 100}{83 + 100} = \frac{16600}{183} = 90,7\%$$

The level of accuracy in the Nave Bayes algorithm is depicted in Figure 4 of the chart diagram, then a comparison diagram between positive, negative, and neutral sentiment is shown in Figure 5, After comparing the accuracy of the diagram, Figure 6 shows the Accuracy, Precision, and Recall values.

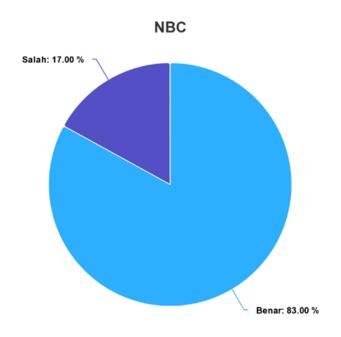


Figure 4. Accuracy result of Nave Bayes classifier algorithm

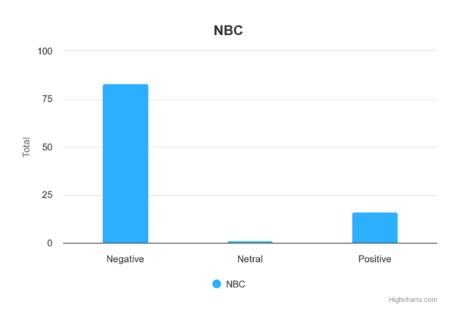


Figure 5. Comparison of positive accuracy and negative accuracy diagrams



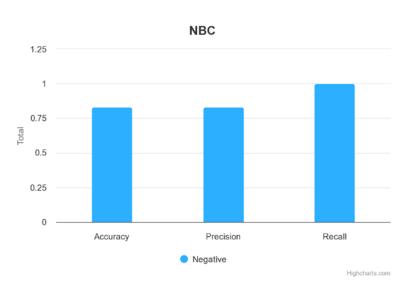


Figure 6. Alpukat application user review diagram

3.6. Visualization

From the data preprocessing results obtained, data visualization is used to see the words often used in reviews by users of the Alpukat application. This data visualization is carried out on the overall data, which is both positive and negative. Visualization of data presented in the Word cloud is shown in Figure 7.



Figure 7. Word cloud analyses sentiment user reviews of applications

4. CONCLUSION

The present study effectively used the Naive Bayes method for sentiment analysis of e-government services, specifically focusing on the Alpukat application within the Special Capital Region of Jakarta. The analytical findings indicate the efficacy of this methodology in discerning and classifying user sentiment, hence offering significant insights into user contentment. This study validates the significance of sentiment analysis within the e-government domain. It presents prospects for future investigations to enhance the caliber of public services by gaining a deeper comprehension of user input. The findings of this study have significant implications that can serve as a foundation for policymakers in formulating policies to enhance user satisfaction with e-government services.

5. ACKNOWLEDGEMENTS

Thanks to Universitas Kristen Satya Wacana for supporting the research.

6. DECLARATIONS

AUTHOR CONTIBUTION

The first authors collected data, forecasted data, analyzed data, and preprocessed data. All writers thoroughly revised and analyzed the paper.

FUNDING STATEMENT

Universitas Kristen Satya Wacana provided the funding for this project.

COMPETING INTEREST

The Authors affirm that this research does not have any conflict of interest.

REFERENCES

- I. Farida, R. Setiawan, A. S. Maryatmi, and N. Juwita, "The Implementation of E-Government in the Industrial Revolution Era 4.0 in Indonesia," *International Journal of Progressive Sciences and Technologies (IJPSAT)*, vol. 22, no. 2, pp. 340–346, 2020, https://doi.org/http://dx.doi.org/10.52155/ijpsat.v22.2.2165.
- [2] A. I. Tanggraeni and M. N. N. Sitokdana, "Analisis Sentimen Aplikasi E-Government pada Google Play Menggunakan Algoritma Naïve Bayes," *JATISI (Jurnal Teknik Informatika dan Sistem Informasi)*, vol. 9, no. 2, pp. 785–795, 2022, https: //doi.org/10.35957/jatisi.v9i2.1835.
- [3] G. Y. Iskandarli, "Applying Clustering and Topic Modeling to Automatic Analysis of Citizens' Comments in EGovernment," *International Journal of Information Technology and Computer Science*, vol. 12, no. 6, pp. 1–10, 2020, https://doi.org/10.5815/ ijitcs.2020.06.01.
- [4] A. Akram, N. Risal, D. Rezky, and A. Sulaiman, "Classification of Sentiment Analysis and Community Opinion Modeling Topics for Application of ICT in Government Operations," vol. 5, no. 1, pp. 35–44, 2023, https://doi.org/https://doi.org/10. 55151/ijeedu.v5i1.99.
- [5] I. S. Jami and A. S. Zubair, "Semantic Web based E-Government System," *Indian Journal of Science and Technology*, vol. 11, no. 44, pp. 1–6, 2018, https://doi.org/10.17485/ijst/2018/v11i44/132332.
- [6] D. Joshi, M. Khalegaonkar, M. Lohikpure, P. Maan, and R. A. Deshmukh, "Sentimental Analysis on E-Governance," *International Journal of Innovative Research in Science and Engineering*, vol. Vol.3, no. Issue 05, pp. 1–9, 2017, https://doi.org/http: //ijirse.com/wp-content/upload/2017/03/PY2087ijirse.pdf.
- [7] M. R. Fahlevvi, "Analisis Sentimen Terhadap Ulasan Aplikasi Pejabat Pengelola Informasi dan Dokumentasi Kementerian dalam Negeri Republik Indonesia di Google Playstore Menggunakan Metode Support Vector Machine," *Jurnal Teknologi dan Komunikasi Pemerintahan*, vol. 4, no. 1, pp. 1–13, 2022, https://doi.org/10.33701/jtkp.v4i1.2701.
- [8] A. Filemon, H. Kaban, and N. Yudistira, "Analisis Sentimen Aplikasi E-Goverment berdasarkan Ulasan Pengguna menggunakan Metode Maximum Entropy dan Seleksi Fitur Mutual Information," *Jurnal Pengembangan Teknologi Informasi dan Ilmu Komputer*, vol. 5, no. 4, pp. 1452–1458, 2021, https://doi.org/https://j-ptiik.ub.ac.id/index.php/j-ptiik/article/view/8877.
- [9] M. K. Anam, B. N. Pikir, and M. B. Firdaus, "Penerapan Na ve Bayes Classifier, K-Nearest Neighbor (KNN) dan Decision Tree untuk Menganalisis Sentimen pada Interaksi Netizen danPemeritah," *MATRIK : Jurnal Manajemen, Teknik Informatika dan Rekayasa Komputer*, vol. 21, no. 1, pp. 139–150, 2021, https://doi.org/10.30812/matrik.v21i1.1092.
- [10] S. Abdelgaber, S. Abdel Gaber, and B. Kazim, "A Proposed Road Map To Enhance E-Government Services: Kuwait Case Study," *Researchgate.Net*, no. December 2019, 2019, https://doi.org/https://www.researchgate.net/publication/339237461_A_ Proposed_Road_Map_To_Enhance_E-Government_Services_Kuwait_Case_Study.

- [11] R. I. Syah, Hoiriyah, and M. Walid, "Analisis Sentimen Pengguna Media Sosial Terhadap Aplikasi M-Health Peduli Lindungi dengan Metode Lexicon Based dan Naive Bayes," vol. 3, no. 2, pp. 54–60, 2020, https://doi.org/http://dx.doi.org/10.21927/ijubi. v6i1.3275.
- [12] T. Tinaliah and T. Elizabeth, "Analisis Sentimen Ulasan Aplikasi PrimaKu Menggunakan Metode Support Vector Machine," *JATISI (Jurnal Teknik Informatika dan Sistem Informasi)*, vol. 9, no. 4, pp. 3436–3442, 2022, https://doi.org/10.35957/jatisi. v9i4.3586.
- [13] R. Apriani, D. Gustian, S. Program, I. Sistem, U. N. Putra, S. Indonesia, J. Raya, C. Kaler, N. 21, and K. Sukabumi, "Analisis Sentimen dengan Naïve Bayes Terhadap Komentar Aplikasi Tokopedia," *Jurnal Rekayasa Teknologi Nusa Putra*, vol. 6, no. 1, pp. 54–62, 2019.
- [14] A. Faesal, A. Muslim, A. H. Ruger, and K. Kusrini, "Sentimen Analisis Terhadap Komentar Konsumen Terhadap Produk Penjualan Toko Online menggunakan Metode K-Means," *MATRIK : Jurnal Manajemen, Teknik Informatika dan Rekayasa Komputer*, vol. 19, no. 2, pp. 207–213, 2020, https://doi.org/10.30812/matrik.v19i2.640.
- [15] I. S. K. Idris, Y. A. Mustofa, and I. A. Salihi, "Analisis Sentimen Terhadap Penggunaan Aplikasi Shopee mengunakan Algoritma Support Vector Machine (SVM)," *Jambura Journal of Electrical and Electronics Engineering*, vol. 5, no. 1, pp. 32–35, 2023, https://doi.org/10.37905/jjeee.v5i1.16830.
- [16] I. Estika, I. Darmawan, and O. N. Pratiwi, "Analisis Sentimen Ulasan Aplikasi Buka Lapak untuk Peningkatan Layanan Menggunakan Algoritma Naive Bayes," vol. 8, no. 5, pp. 4367–4376, 2021, https://doi.org/https://openlibrarypublications. telkomuniversity.ac.id/index.php/engineering/article/view/14676.
- [17] S. Surohman, S. Aji, R. Rousyati, and F. F. Wati, "Analisa Sentimen Terhadap Review Fintech dengan Metode Naive Bayes Classifier dan K- Nearest Neighbor," *EVOLUSI : Jurnal Sains dan Manajemen*, vol. 8, no. 1, pp. 93–105, 2020, https://doi.org/ 10.31294/evolusi.v8i1.7535.
- [18] A. Athallah Muhammad, D. Sandya Prasvita, J. R. Fatmawati Raya, P. Labu, K. Cilandak, K. Depok, and D. Khusus Ibukota Jakarta, "Analisis Sentimen Pengguna Aplikasi Dana Berdasarkan Ulasan pada Google Play Menggunakan Metode Support Vector Machine," vol. 3, no. 2, pp. 194–204, 2022, https://doi.org/https://conference.upnvj.ac.id/index.php/senamika/article/ view/2171/1660.
- [19] I. Atoum, "A novel framework for measuring software quality-in-use based on semantic similarity and sentiment analysis of software reviews," *Journal of King Saud University - Computer and Information Sciences*, vol. 32, no. 1, pp. 113–125, 2020, https://doi.org/10.1016/j.jksuci.2018.04.012.
- [20] M. K. Khoirul Insan, U. Hayati, and O. Nurdiawan, "Analisis Sentimen Aplikasi Brimo pada Ulasan Pengguna di Google Play Menggunakan Algoritma Naive Bayes," *JATI (Jurnal Mahasiswa Teknik Informatika)*, vol. 7, no. 1, pp. 478–483, 2023, https://doi.org/10.36040/jati.v7i1.6373.